


Container mixer Type COM

Ideal mixing quality for dry and moist materials at variable filling levels

The container mixer is designed for flexible individual order production. It is particularly suitable if the weighing, mixing and filling steps take place decoupled in separate rooms. While setup and cleaning takes place in one room, production can continue in other areas.

Mixtainers® serve as a mixing vessel. They are very precisely manufactured. A so-called Washtainer® may be docked for the purpose of automatic wet cleaning and drying.

The Sinconvex®-Multiplane® spiral blade initiates a three dimensional flow of the mixing goods; creating a helical upward movement on the periphery and downward flow in the center. The machine provides very good mixing results; on request also very gentle.

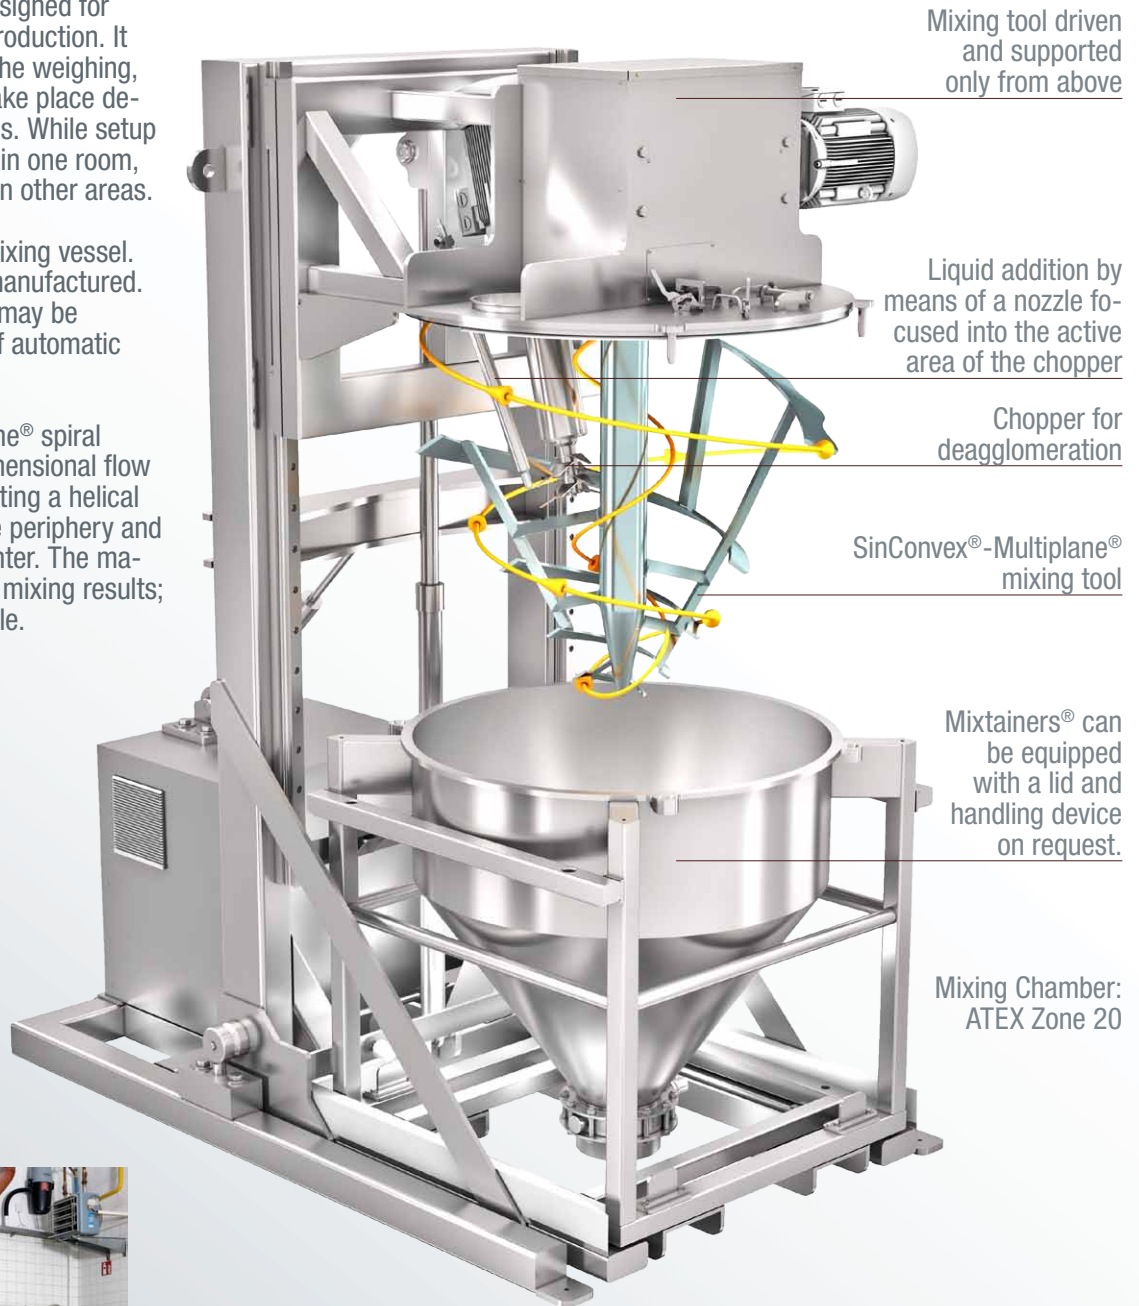

Mixing tool driven and supported only from above

Liquid addition by means of a nozzle focused into the active area of the chopper

Chopper for deagglomeration

SinConvex®-Multiplane® mixing tool

Mixtainers® can be equipped with a lid and handling device on request.

Mixing Chamber: ATEX Zone 20



COM for food flavourings

COM-17/09-2021 EN



LIFESCIENCE




FOOD



ANIMAL CARE



DETERGENTS



CERAMICS



POLY

User Benefits

- ✓ The mixer guarantees ideal mixing qualities.
- ✓ The container functions as the mixing room; it is used for component dosing, for mixing and as a pre-device for the filling machine / for the extruder / for liquid preparation.
- ✓ Very well suitable for fully automatic production based on containers
- ✓ Particularly well suitable for low-dust goods and easy handling
- ✓ Comfortable and fast cleaning if recipes differ greatly
- ✓ Optionally, the container lid is handled automatically.

Piloting


amixon® places special importance on the pilot phase in the test centre. Your mixing processes are simulated here. This way, we support you in your product development phase. amixon® has a main test center in Paderborn (Germany). Further test centers are situated in Japan, Thailand, India, South Korea and the USA.



Technical Data

On request, amixon® manufactures mixer sizes in 100 liter steps from 100 liters to 50,000 liters


| Container mixer Type COM The type designation is similar to the batch size in liters. Ideal mixing quality even at low filling levels. | Approximate gross volume of the mixer | Approximate dimensions of the standard version. Please ask for detailed dimension sheets! | | | | The drive power required can vary widely depending on the bulk density, flow characteristics, rotational frequency and the processing task (such as deagglomeration). | | Weight may vary considerably depending on the size of the drive and the type of design. The additional dynamic loads are very low. | |
|---|---------------------------------------|--|------|------|------|---|----|--|--|
| | | A | B | C | D | from | to | | |
| | | [mm] | | | | [kW] | | | |
| | [liters] | | | | | | | | |
| 100 | 132 | 2110 | 1570 | 1030 | 790 | 1 | 3 | 1250 | |
| 200 | 263 | 2600 | 1900 | 1230 | 990 | 3 | 7 | 2100 | |
| 300 | 394 | 3100 | 2150 | 1400 | 1130 | 4 | 12 | 2700 | |
| 1000 | 1304 | 4700 | 3200 | 1960 | 1740 | 11 | 35 | 5100 | |
| 1500 | 1952 | 5200 | 3600 | 2200 | 2000 | 14 | 46 | 6300 | |
| 4000 | 5181 | 7000 | 4900 | 2900 | 2650 | 24 | 85 | 10000 | |

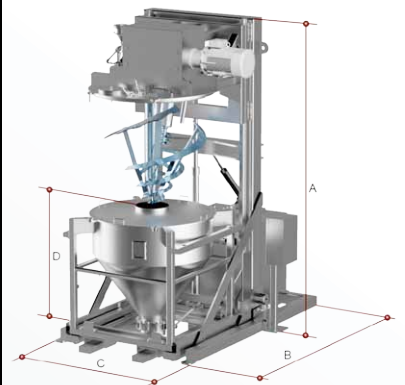

- The rotational frequency can vary widely from about 0,8 m/s to about 3,5 m/s. Usually amixon® container mixers operate at low speed.
- As a welding specialist, amixon® is qualified by European, Japanese and American authorities with regard to different materials. The materials in contact with the mixing goods are either mild steel S355J2Ge, Hardox, austenitic stainless steels 1.4301, 1.4541, 1.4571, 1.4404, 1.4539, 1.4529, Duplex stainless steels 1.4462, 1.4162, 1.4363, and Alloy 59-2.4605, Hastelloy C22 and nickel.
- The mixers meet the highest hygienic requirements and comply with the EHEDG guidelines for dry and wet cleaning regime. They also meet the FDA hygiene guidelines and the design requirements of 3-A Sanitary Standards.



amixon GmbH
Halberstädter Straße 55
33106 Paderborn
Germany
+49 (0) 52 51 / 68 88 88-0
sales@amixon.com
www.amixon.com

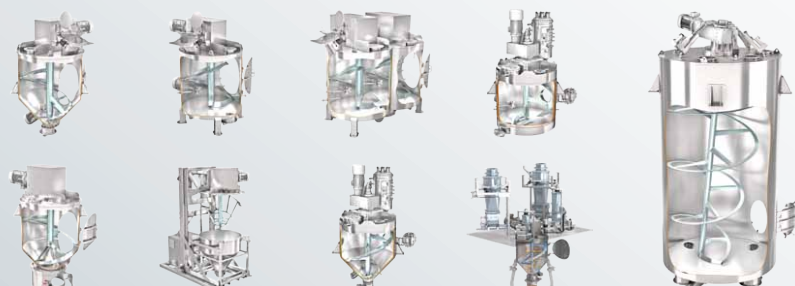

amixon® manufactures high precision mixers, vacuum mix-dryers, synthesis reactors and granulators with maximum fabrication depth. All components of the amixon®-mixers are made in Germany. The production of the machines takes place exclusively in the amixon®-factory in Paderborn, Germany.

© by amixon GmbH, Paderborn. Reprinting or transfer to electronic media only permitted after written approval. We reserve the right to make changes due to progress in process engineering and manufacturing technology.