

KoneSlid® - Mixer

Type KS (patented)


- ✓ Optimum mixing qualities
- ✓ Low rotational speed
- ✓ Particularly short mixing time
- ✓ Very fast discharge
- ✓ Excellent accessibility

... these are the characteristics of this new mixing system. The mixture is moved upwards at the perimeter of the mixing chamber and flows downwards in the centre. As it flows downwards, the product stream is conducted to the periphery by a conical mixing element. After about 4 revolutions the entire volume has already been completely shifted by the mixing tool once. The ideal mixture quality is achieved after approximately 20 to 30 revolutions.


The input of energy is very low; to that extent the mixing process is particularly gentle. As a rule, the particle shapes and sizes remain unchanged. The KoneSlid® mixer was developed particularly for goods such as those that result from spray drying, fluidised bed granulation or belt drying; the particles can be of various sizes and fragile. Examples of this include: instant beverage powders, dry milk derivatives, instant soups, muesli, deep-frozen foods, tablet masses and metallic powders. The KoneSlid® mixer is suitable for all kinds of dry, moist and even suspended powders.

Even faster than the mixing process is the discharge, which takes place by means of the closing system moving downwards. The mixture flows out within a few seconds. Usually no conical piles are formed in the container positioned below. The mixture is completely discharged, apart from minimal dust residues. The large inspection doors are particularly advantageous. They allow comfortable cleaning and inspection. All parts of the mixer are accessible for manual dry cleaning.


Please visit us in Paderborn. amixon® cordially invites you to take part in mixing tests and assures you of optimum results in advance!

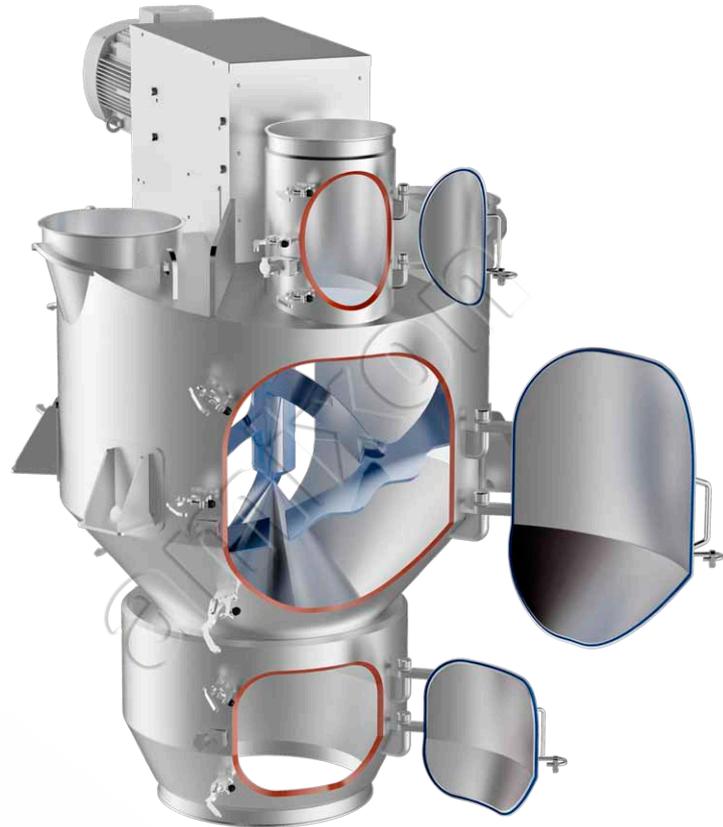

Type KS 1000 with 2 CleverCut® designed inspection doors

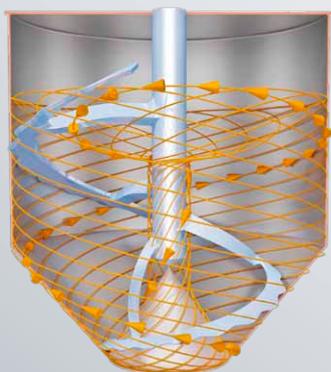

KoneSlid® flow principle

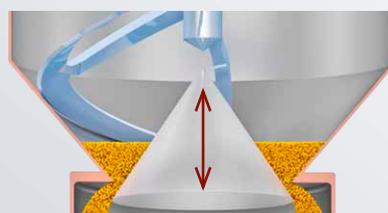

Virtually complete discharge in a few seconds



CleverCut® seal

End-of-the-line mixing plants


Additive components: vitamins, encapsulated fish oil, trace elements and other sensitive goods

Fluidized bed dryer and additive component dosage

Hygienic transfer tubes

Two KoneSlid® mixers

Filling and packaging

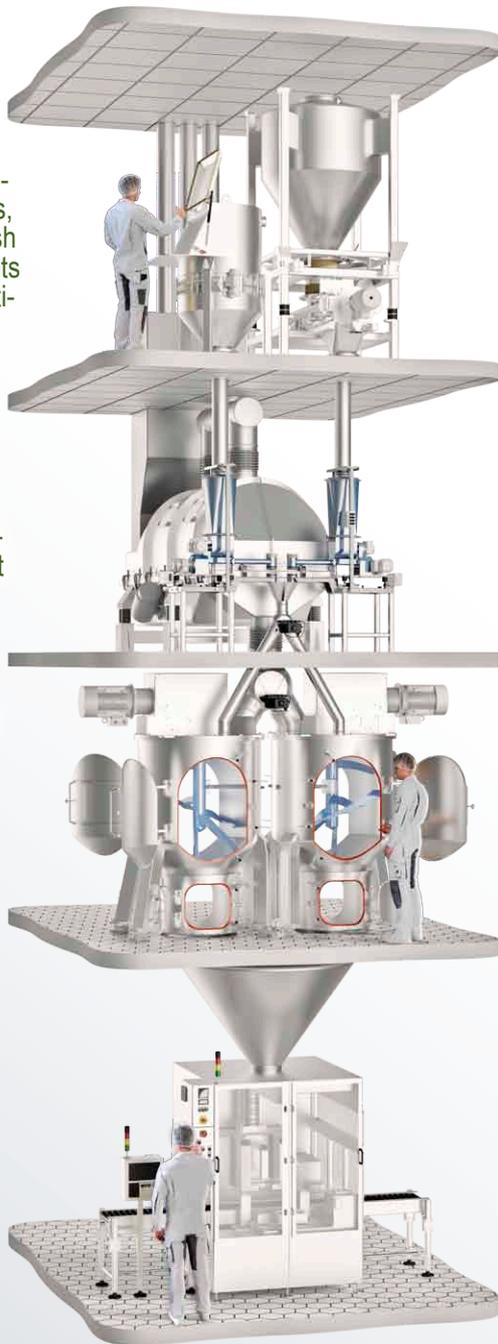


Supply, weighing, sieving, batching

Mixing KoneSlid® mixer

Collecting container movable on rails

Control sieving on demand

Filling and packaging

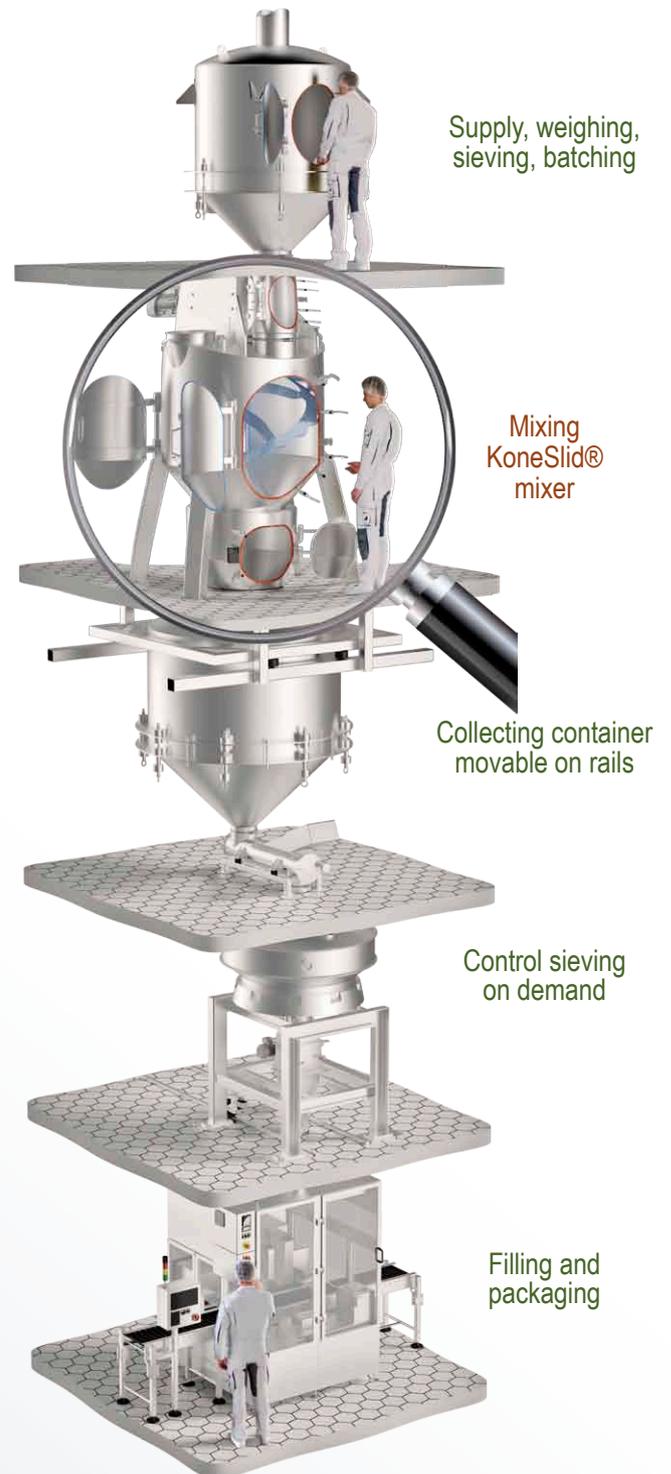

All components of the amixon®-mixers are made in Germany. The production of the machines takes place exclusively in the amixon®-factory in Paderborn, Germany. We reserve the right to make changes due to progress in process engineering and manufacturing technology.

© by amixon GmbH, Paderborn. Reprinting or transfer to electronic media only permitted after written approval.

The end-of-the-line plants illustrated here in simplified form show a particularly hygienic variant for the manufacture of dietary foods. amixon® only manufactures the mixers. The components with green captions are not part of our product range.

amixon® GmbH
Halberstädter Straße 55
33106 Paderborn
Germany

Phone: +49 (0) 5251 68 88 88 – 0
Fax: +49 (0) 5251 68 88 88 – 999
e-mail: info@amixon.com
www.amixon.com

User benefits:

- ✓ Ideal mixing quality at low energy input
- ✓ Varying filling degrees from about 10 to 100% of the type designation
- ✓ Cleaning: comfortable, safe, ideally ergonomic, wet or dry, manual or automatic
- ✓ Mixer available, if desired, with several CleverCut® inspection doors
- ✓ Virtually complete discharging in a few seconds, without slope cones, without segregation
- ✓ amixon® has test mixers for mixing trials available